

MINI32 Wemos ESP-WROOM-32



Produktkode: 600
Tilgjengelighet: 3
Custom Field 5 (Location): N9, N8

Pris: kr. 140,00

Short Description

MINI Wemos D1 ESP32 ESP-32 WIFI Development Bluetooth ESP8266 CP2104 Module

Beskrivelse

Wemos MINI D1 ESP32

Wemos MINI D1 ESP32 ESP-32S WIFI + Bluetooth ESP8266 Module CP2104 For Arduino

Kort: Adafruit ESP32 Feather

USB driver: CP2104

Shipping list:

1. Lange weibliche pins x4pcs
2. kurze weibliche pins x4pcs
3. Normal pins x4pcs
4. mini D1 ESP32 blue x1pcs

ESP32S

Description:

ESP-32S Wifi Bluetooth combo module is ultra high performance and ultra low power consumption Wi-Fi and Bluetooth combo wireless platform based on ESPRESSIF ESP32 chipset. ESP-32S integrates dual-core processor, 448 KByte ROM, 520 KByte SRAM, 16 KByte SRAM in RTC, 802.11 b/g/n/e/l Wi-Fi, Bluetooth v4.2 BR/EDR & BLE, clocks & Times, abundant peripheral Interfaces and security mechanism.

ESP-32S Wifi Bluetooth combo module provides SDK Firmware for fast on-line programming and open source toolchains based on GCC for development support. It is designed for Generic low power IoT sensor hub, loggers, video streaming for camera, Wi-Fi & Bluetooth enabled devices, Home automation and mesh network applications, aimed at makers, hardware engineers, software engineers and solution providers.

ESP32 is a single chip 2.4 GHz WiFi and Bluetooth combo chip designed with TSMC ultra low power 40 nm technology. It is designed and optimized for the best power performance, RF performance, robustness, versatility, features and reliability, for a wide variety of applications, and different power profiles.

ESP32 is the most integrated solution for WiFi + Bluetooth applications in the industry with less than 10 external components. ESP32 integrates the antenna switch, RF balun, power amplifier, low noise receive amplifier, filters, and power management modules. As such, the entire solution occupies minimal Printed Circuit Board (PCB) area.

ESP32 is designed for mobile, wearable electronics, and Internet of Things (IoT) applications. It has many features of the state-of-the-art low power chips, including fine resolution clock gating, power modes, and dynamic power scaling.

Key Features:

CPU and Memory: Xtensa® 32-bit LX6 Dual-core processor, up to 600 DMIPS.

448 KByte ROM

520 KByte SRAM

16 KByte SRAM in RTC.

QSPI can connect up to 4* Flash/SRAM, each flash should be less than 16 Mbytes.

Supply Voltage: 2.2V~3.6V

WIFI

802.11 b/g/n/e/i

802.11 n (2.4 GHz), up to 150 Mbps

802.11 e: QoS for wireless multimedia technology.

WMM-PS, UAPSD

MPDU and A-MSDU aggregation

Block ACK

Fragmentation and defragmentation

Automatic Beacon monitoring/scanning

802.11 i security features: pre-authentication and TSN

Wi-Fi Protected Access (WPA)/WPA2/WPA2-Enterprise/Wi-Fi Protected Setup (WPS)

Infrastructure BSS Station mode/SoftAP mode

Wi-

Fi Direct (P2P), P2P Discovery, P2P Group Owner mode and P2P Power Management

UMA compliant and certified

Antenna diversity and selection

Bluetooth:

Compliant with Bluetooth v4.2 BR/EDR and BLE specification

Class-1, class-2 and class-3 transmitter without external power amplifier

Enhanced power control

+10 dBm transmitting power

NZIF receiver with -98 dBm sensitivity

Adaptive Frequency Hopping (AFH)

Standard HCI based on SDIO/SPI/UART High speed UART HCI, up to 4 Mbps

BT 4.2 controller and host stack

Service Discover Protocol (SDP)

Security Manage Protocol (SMP)

Bluetooth Low Energy (BLE)

ATT/GATT

HID

All GATT-based profile supported

SPP-Like GATT-based profile

BLE Beacon

A2DP/AVRCP/SPP, HSP/HFP, RFCOMM

CVSD and SBC for audio codec

Bluetooth Piconet and Scatternet

Clocks and timer

Internal 8 MHz oscillator with calibration

Internal RC oscillator with calibration
External 2 MHz to 40 MHz crystal oscillator
External 32 kHz crystal oscillator for RTC with calibration
Two timer groups, including 2 x 64-bit timers and 1 x main watchdog in each group
RTC watchdog

Peripheral interface:

12-bit SAR ADC up to 18 channels
2 x 8-bit D/A converters
10 x touch sensors
Temperature sensor
4 x SPI, 2 x I2S, 2 x I2C, 3 x UART
1 host (SD/eMMC/SDIO), 1 slave (SDIO/SPI)
Ethernet MAC interface with dedicated DMA and IEEE 1588 support
CAN 2.0
IR (TX/RX)
Motor PWM, LED PWM up to 16 channels
Hall sensor
Ultra low power analog pre-amplifier

Security:

IEEE 802.11 standard security features all supported, including WPA, WPA/WPA2 and WAPI
Secure boot
Flash encryption
1024-bit OTP, up to 768-bit for customers
Cryptographic hardware acceleration: -AES-HASH(SHA-2) library-RSA-ECC-
Random Number Generator (RNG)

Development support:

SDK Firmware for fast on-line programming
Open source toolchains based on GCC

Application:

Generic low power IoT sensor hub
Generic low power IoT loggers
Video streaming from camera
Over The Top (OTT) devices
Music players - Internet music players - Audio streaming devices
Wi-Fi enabled toys - Loggers - Proximity sensing toys
Wi-Fi enabled speech recognition devices
Audio headsets
Smart power plugs
Home automation
Mesh network

Size:

The size of ESP-32S Wifi module is 16mm x 24mm x 3mm.


The ESP-32S deploys 4MB SPI Flash with WSOP?8 package. It also uses 3DBi PCB antenna on board.

Packing list:

1x ESP-32S Wifi Bluetooth Combo Module

Pinout

esp32 Mini kit PINOUT

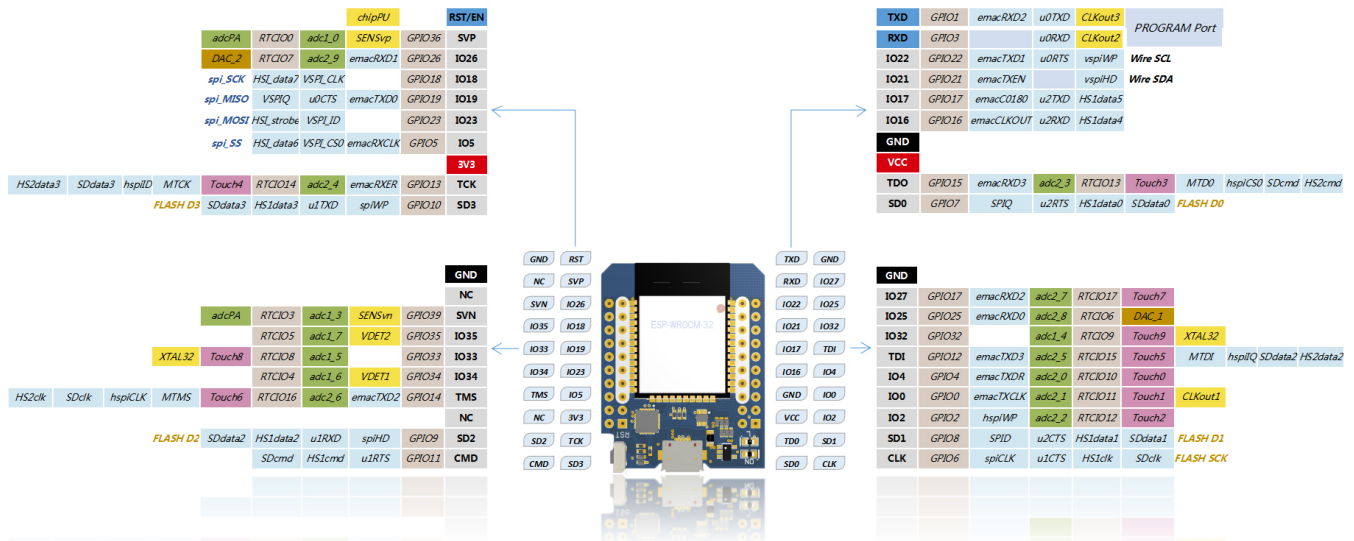

PINS:

Board Pin	Function	ESP8266 Pin
TX	TXD	TXD
RX	RXD	RXD
A0	Analog input	A0
D0	I/O	GPIO16
D1	I/O, SCL	GPIO5
D2	I/O, SDA	GPIO4
D3	I/O, 10k pull-up	GPIO0
D4	I/O, 10k pull-up, BUILTIN_LED	GPIO2
D5	I/O, SCK	GPIO14
D6	I/O, MISO	GPIO12
D7	I/O, MOSI	GPIO13
D8	I/O, 10k pull-down, SS	GPIO15

GND	Ground	GND
5V	5V	
3V3	3.3V	3.3V
RST	Reset	RST

All of the I/O pins have interrupt/PWM/I2C/one-wire capability, except for D0

Product Gallery

